



Specifications: Model 302(7) NPT Valve Horizontal Flow


Flow Direction
Arrow

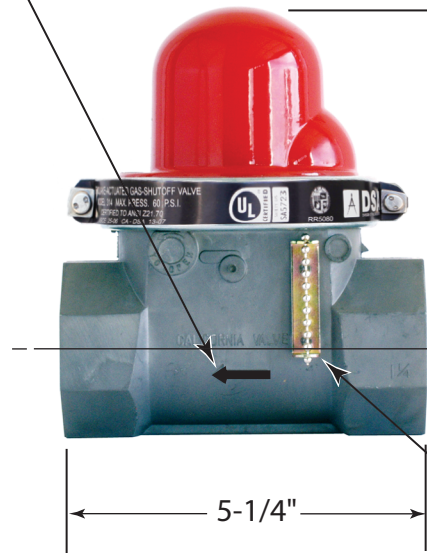

5"

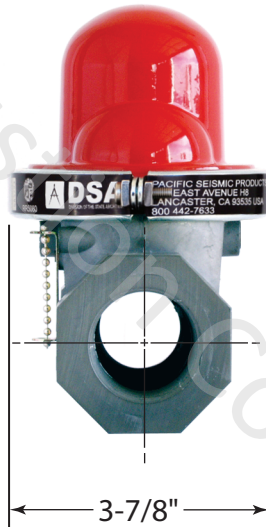

Visual
Status
Window

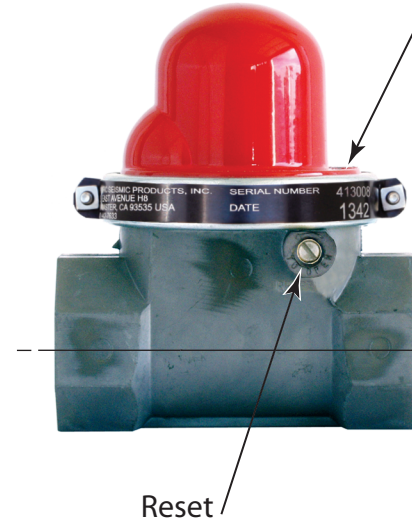

| Valve Model# | CA-DSA No. | Length | Height | Width | Nominal Pipe Size | Threads Per Inch | APPLICATION | DATA |
|--------------|------------|--------|--------|--------|-------------------|------------------|---------------|--------------|
| | | | | | | | Max. Pressure | Fuel |
| 302(7) | 13-04 | 5-1/4" | 5" | 3-7/8" | 1-1/4" | 11-1/2 | 7.0 psi | Dry Fuel Gas |

California Seismic Valves are UL listed in the USA. Certified by the California State Architect's Office, Approved by the City of Los Angeles, and are warranted free of manufacturer's defects for 30 years. All valves meet California Standards for Earthquake Actuated Automatic Gas Shut off Systems, Standard No. 12-12-1, ANSI Z21.21, 2012 and ASCE 25-06 Standards.

Pacific Seismic Products
233 East Avenue H-8 • Lancaster, CA 93535 • USA

Tel (661) 942-4499
Fax (661) 942-0999
TF (800) 4-GAS-OFF
www.4GasOff.net

